



MICRO LAMBDA WIRELESS, INC.

FEATURES

- 500 MHz to 50 GHz
- Compensation for Temperature Drift
- Input Regulators for Improved Stability
 - Versus Power Supply Variations
- 0 to 10 Volt Tuning
- 0° C to +65° C Temperature Range

YIG TUNED FILTERS WITH COMMERCIAL ANALOG DRIVERS PA SERIES



DESCRIPTION

MICRO LAMBDA YIG Filters, model types MLFP Series, MLFR-Series, MLFRD-Series and MLUN-Series are available with integrated analog driver circuits.

MICRO LAMBDA drivers eliminate the need for customers to design or develop their own driver circuits and sophisticated test and alignment procedures. Integrating a driver at MICRO LAMBDA's factory ensures that peak performance will be achieved at the time of manufacture. Alignment and compensation with the particular YIG filter can be maximized down to the component level.

All drivers in this series provide input voltage regulators, and compensation circuits to improve frequency drift.

YIG drivers act as Voltage-To-Current converters, converting standard 0-10 Volts numbers into mA of current to tune a magnetic tuning coil.

POSITIVE INPUT ANALOG DRIVERS PA Series

MICRO LAMBDA positive analog drivers are available for commercial environments. Standard products provide 0-10 Volt tuning input and operate over the 0° to 65° temperature range.

The PA series of analog driver provide the main coil current from the +15 volt input line. Current increases linearly from 0 mA = 0 GHz at a rate of approximately 50 mA per 1 GHz. A 2-8 GHz filter will require 100 mA @ 2 GHz and 400 mA @ 8 GHz.

Negative input drives which provide the main coil current on the -15 volt input line, are available as an option.

Frequency drift performance can be optimized with the inclusive temperature compensation circuits within the driver. This yields filter/driver combinations set at the factory with excellent frequency accuracy performance.

In special cases, speed-up circuits like those used to improve the tuning speed of YIG oscillators can also be included to provide both fast-tuned filters and with good accuracy. Filter parameters can be maximized during factory alignment to meet customer specific requirements.

AVAILABLE OPTIONS FOR PA-SERIES COMMERCIAL ANALOG DRIVERS

- Optional Tuning Speeds
- Optional Sweep Speeds
- Negative Input Drivers



STANDARD POSITIVE INPUT ANALOG DRIVER SELECTION GUIDE: PA SERIES

**YIG TUNED FILTERS WITH
COMMERCIAL ANALOG DRIVERS**

DRIVER INPUT & RESPONSE	SPECIFICATION (0 to +65 deg. C)
-------------------------	----------------------------------

Main Coil Driver Function

Tuning Command	0 Volts = Lowest Frequency +10 Volts = Highest Frequency
Tuning Accuracy (excluding hysteresis)	See Table
Tuning Speed (Note 1)	2 mS for 1 GHz step to within +/-10 MHz.
Sweep Speed (Note 2) (0-10 Volt Ramp)	50 mS up / 10 mS retrace for 1 GHz, Linearity @ 0.1%

Main Driver Inputs

Supply Voltage & Current	+15 V +/- .5 V @ Filter Tuning Current + 50 mA, Max. -15 V +/- .5 V @ 50 mA, Max.
Supply Voltage Pushing	+/- 100 kHz, Max. @ +/- .5 Vdc
Supply Voltage Ripple	10 mV Ripple Pk-Pk from 2 kHz to 3 MHz
Ground	Chassis Ground
YIG Heater Voltage & Current	+24 Vdc +/- 4 Vdc @ 300 to 750 mA surge for 2 seconds, 100 - 150 mA steady state depending on filter type
Input Impedance	Polarity independent : +/- 12 Vdc or +/- 15 Vdc acceptable
Common Rejection Mode	> 10 k-Ohms > 40 dB

Note 1: Optional .5 mS Tuning Speeds Available

2: Optional 5 mS Sweep Speed Available



**MICRO LAMBDA
WIRELESS, INC.**

**YIG TUNED FILTERS WITH
COMMERCIAL ANALOG DRIVERS
PA SERIES – CONTINUED**

Bandpass Filters with Positive Input Analog Drivers (0° C to +65° C)

MODEL	#	Frequency	3 dB	Accuracy	Current	Current	Outline
NUMBER	Stages	GHz	Bandwidth (MHz)	(MHz) *	+15V (mA)	-15V (mA)	Drawing
MLFP-20520PA	2	0.50 to 2.0	20	+/- 10	350	50	21-008
MLFP-22018PA	2	2.0 to 18.0	25	+/- 20	1050	50	21-008
MLFP-22026PA	2	2.0 to 26.5	20	+/- 35	1200	50	21-008
MLFP-40520PA	4	0.50 to 2.0	20	+/- 10	350	50	21-008
MLFP-42008PA	4	2.0 to 8.0	20	+/- 20	550	50	21-008
MLFP-42018PA	4	2.0 to 18.0	40	+/- 20	1050	50	21-008
MLFP-42026PA	4	2.0 to 26.5	25	+/- 35	1200	50	21-008
MLFP-46018PA	4	6.0 to 18.0	100	+/- 20	1050	50	21-008
MLFP-48018PA	4	8.0 to 18.0	400	+/- 25	1050	50	21-008
MLFP-43040PA	4	3.0 to 40.0	30	+/- 50	1450	50	21-148
MLFP-43044PA	4	3.0 to 44.0	30	+/- 60	1550	50	21-148
MLFP-43050PA	4	3.0 to 50.0	30	+/- 90	2100	50	21-138
MLFP-47040PA	4	7.0 to 40.0	35	+/- 50	1450	50	21-148
MLFP-41840PA	4	18.0 to 40.0	50	+/- 50	1450	50	21-148
MLFP-62018PA	6	2.0 to 18.0	40	+/- 20	1050	50	21-009-1
MLFP-62026PA	6	2.0 to 26.5	30	+/- 35	1200	50	**
MLFP-66018PA	6	6.0 to 18.0	100	+/- 20	1050	50	21-009-1
MLFP-68018PA	6	8.0 to 18.0	500	+/- 25	1050	50	21-009-1
MLFP-70520PA	7	0.5 to 2.0	20	+/- 10	350	50	21-009-1
MLFP-72018PA	7	2.0 to 18.0	40	+/- 35	1050	50	21-009-1
MLFP-72026PA	7	2.0 to 26.5	30	+/- 35	1350***	50	**
MLFP-76018PA	7	6.0 to 18.0	500	+/- 45	1050	50	21-009-1
MLFP-78020PA	7	8.0 to 20.0	500	+/- 45	1150	50	21-009-1
MLFP-76018LPA	7-L	6.0 to 18.0	500	+/- 45	1050	50	21-009-1
MLFP-78018LPA	7-L	8.0 to 18.0	500	+/- 45	1050	50	21-009-1
MLFP-78020LPA	7-L	8.0 to 20.0	500	+/- 45	1150	50	21-009-1

* Accuracy includes frequency drift and linearity errors over the temperature range.

** Outline drawing is available from factory.

***Requires +18 to +24 Vdc on Positive supply.



Band Reject Filters with Positive Input Analog Drivers (0° C to +65° C)

Model	Frequency	3 dB	40 dB	Accuracy	Current	Current	Outline
Number	GHz	Bandwidth (MHz)	Bandwidth (MHz)	(MHz) *	+15 V (mA)	-15 V (mA)	Drawing
MLFR-0102PA	1.0 to 2.0	100	10	+/- 5	250	50	21-021
MLFR-0204PA	2.0 to 4.0	125	15	+/- 7	350	50	21-021
MLFR-0408PA	4.0 to 8.0	150	20	+/- 10	550	50	21-021
MLFR-0812PA	8.0 to 12.4	150	25	+/- 12	750	50	21-021
MLFR-1218PA	12.4 to 18.0	150	25	+/- 12	1050	50	21-021
MLFR-0502PA	0.50 to 2.0	150	5 @ 30dB	+/- 5	250	50	21-021
MLFR-0206PA	2.0 to 6.0	150	20	+/- 10	450	50	21-021
MLFR-0208PA	2.0 to 8.0	150	15	+/- 14	550	50	21-021
MLFR-0212PA	2.0 to 12.0	150	10	+/- 15	750	50	21-021
MLFR-0218PA	2.0 to 18.0	150	10	+/- 25	1050	50	21-021
MLFR-0220PA	2.0 to 20.0	150	5	+/- 25	1050	50	21-021
MLFR-0418PA	4.0 to 18.0	150	10	+/- 20	1050	50	21-021
MLFR-160418PA	4.0 to 18.0	150	25	+/- 20	1050	50	21-021
MLFR-0618PA	6.0 to 18.0	150	25	+/- 18	1050	50	21-021
MLFR-160618PA	6.0 to 18.0	150	25	+/- 18	1050	50	21-021
MLFR-0818PA	8.0 to 18.0	150	35	+/- 18	1050	50	21-021
MLFR-160818PA	8.0 to 18.0	150	35	+/- 18	1050	50	21-021

Dual Channel Band Reject Filters with Positive Input Analog Drivers (0° C to +65° C)


MLFRD-0206PA	2.0 to 6.0	120	5	+/- 10	450	50	**
MLFRD-0208PA	2.0 to 8.0	120	5	+/- 12	550	50	**
MLFRD-0618PA	6.0 to 18.0	100	15	+/- 20	1050	50	**
MLFRD-0818PA	8.0 to 18.0	100	15	+/- 18	1050	50	**

Ultra Notch Band Reject Filters with Positive Input Analog Drivers (0° C to +65° C)


Model	Frequency	3 dB	60 dB	Accuracy	Current	Current	Outline
Number	GHz	Bandwidth (MHz)	Bandwidth (MHz)	(MHz) *	+15 V (mA)	-15 V (mA)	Drawing
MLUN-0305PA	.35 to .52	50	4 @ 30dB	+/- 2	100	50	21-165
MLUN-0502PA	.50 to 2.0	80	5 @ 40dB	+/- 5	250	50	21-165
MLUN-0206PA	2.0 to 6.0	120	17	+/- 10	450	50	21-165
MLUN-0618PA	6.0 to 18.0	175	35	+/- 18	1050	50	21-157
MLUN-0218PA	2.0 to 18.0	175	5	+/- 25	1050	50	21-157

* Accuracy includes frequency drift and linearity errors over the temperature range.

** Outline drawing is available from Factory.


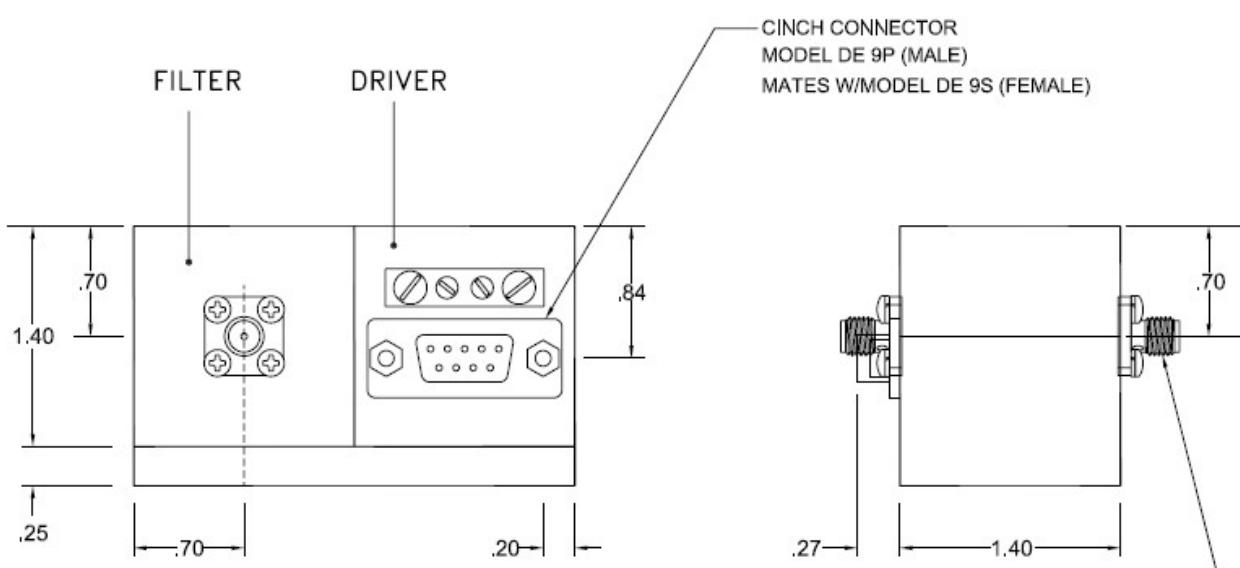


CINCH CONNECTOR
MODEL DE 9P (MALE)
MATES W/MODEL DE 9S (FEMALE)

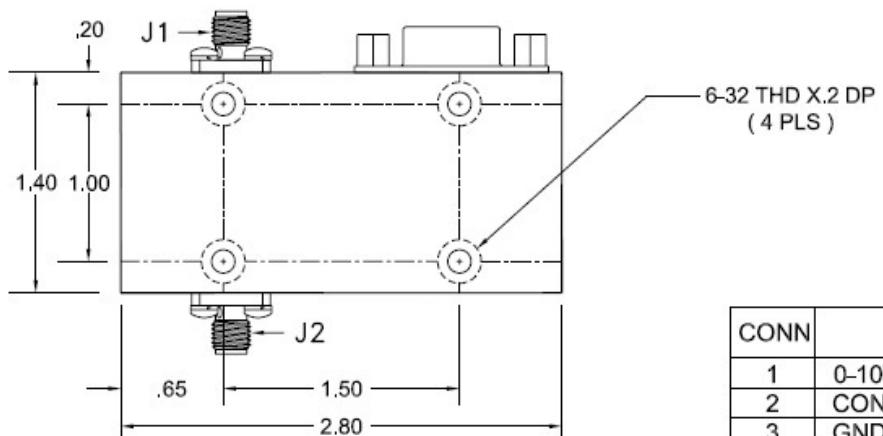

CONN	FUNCTIONS
1	0-10V DRV CONT.
2	CONT. RETURN
3	GND
4	- SUPPLIES VOLTAGE
5	+ SUPPLIES VOLTAGE
6	20-30 V HTR SUPPLY
7	HEATER RETURN
8	N/C
9	N/C
J1	FILTER RF INPUT
J2	FILTER RF OUTPUT

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		CONTRACT NO.					
FRACTIONS DECIMALS ANGLES							
▲ .00 ▲.010 ▲.025							
MATERIAL CARPENTER 49		APPROVALS	DATE	MICRO LAMBDA WIRELESS, INC.			
		DRAWN N.NGUYEN	7/09/04				
FINISH		CHECKED		BPF WITH ANALOG DRIVER, 1.4" STANDARD			
DO NOT SCALE DRAWING		ISSUED		SIZE	CAGE No. 0RN63	ORG. No.	REV. B 21 - 008

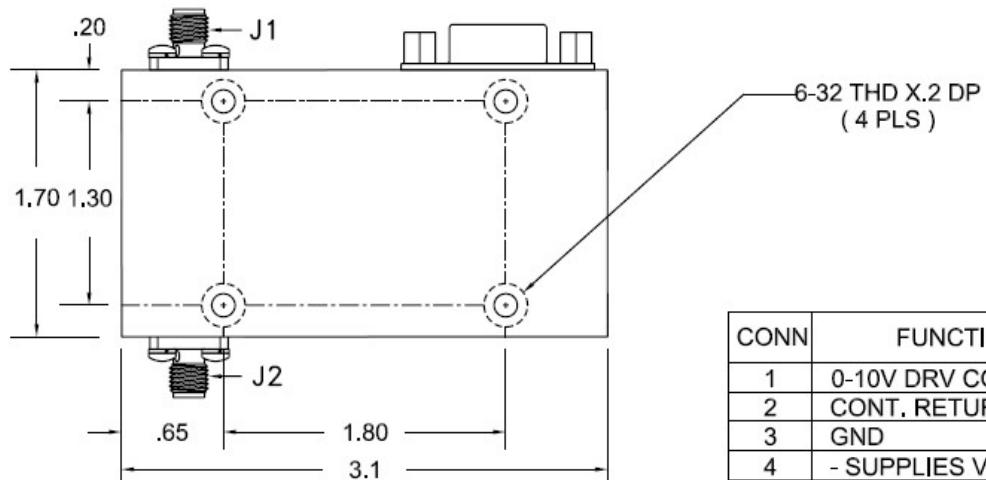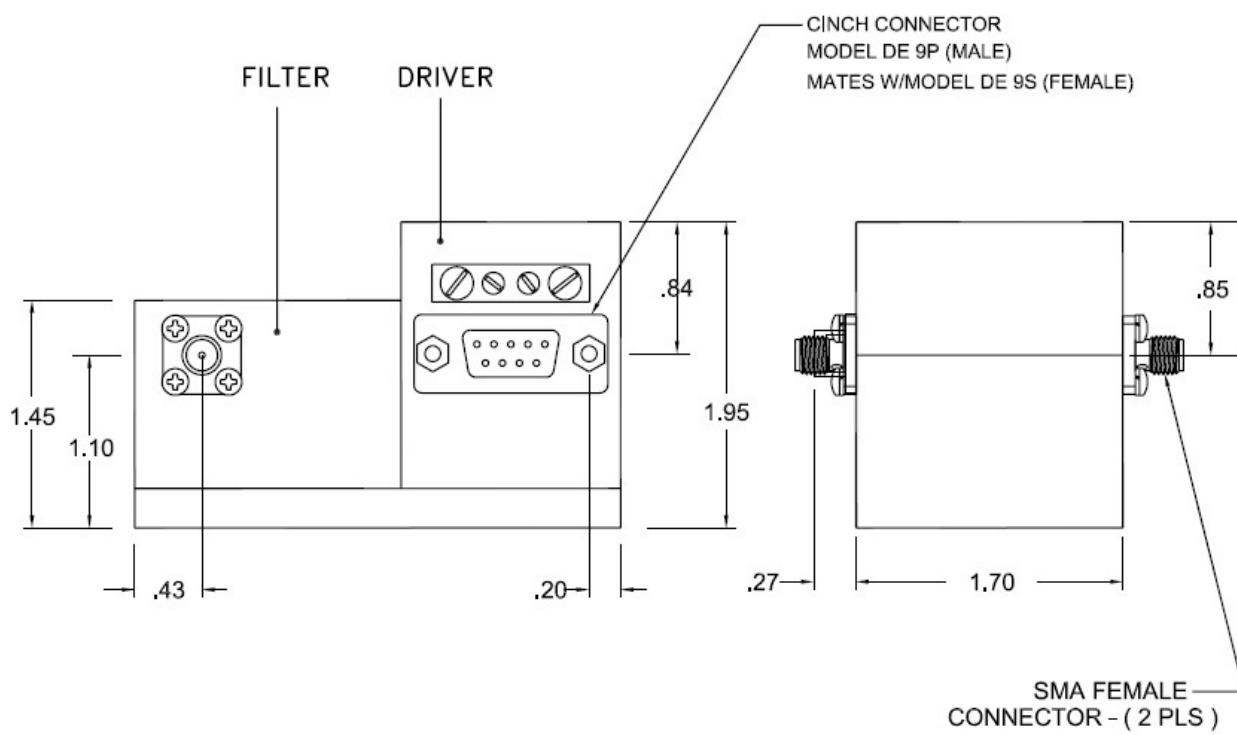

CONN	FUNCTIONS
1	0-10V DRV CONT.
2	CONT. RETURN
3	GND
4	- SUPPLIES VOLTAGE
5	+ SUPPLIES VOLTAGE
6	20-30 V HTR SUPPLY
7	HEATER RETURN
8	N/C
9	N/C
J1	FILTER RF INPUT
J2	FILTER RF OUTPUT

UNLESS OTHERWISE SPECIFIED DIMENSIONS
ARE IN INCHES
TOLERANCE ARE:
FRACTIONS DECIMALS ANGLES
 xx ±.010 .xx ±.005 °xx ±.005

CONTRACT NO.

APPROVALS

DATE



MICRO LAMBDA WIRELESS, INC.

MATERIAL

CARPENTER 49

DRAWN

N.NGUYEN

7/09/04

FINISH

CHECKED

ISSUED

SIZE

CAGE No.
0RN63



DWG. NO.

21 - 009 - 1

REV. A

BPF WITH ANALOG DRIVER, 1.7" STANDARD

DO NOT SCALE DRAWING

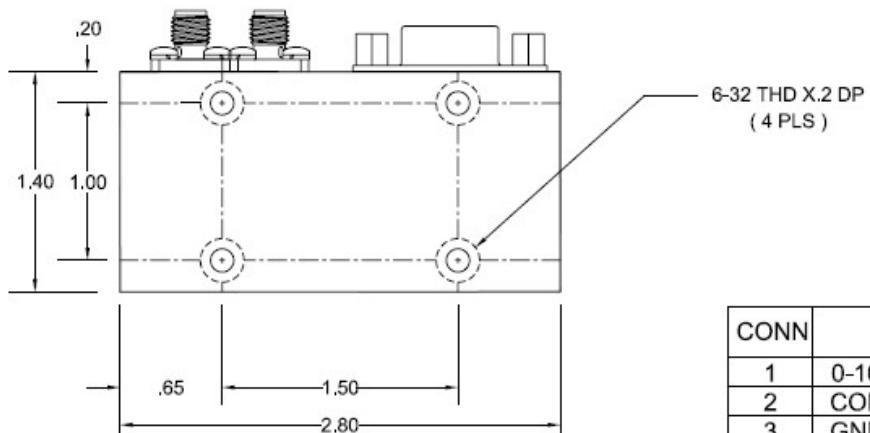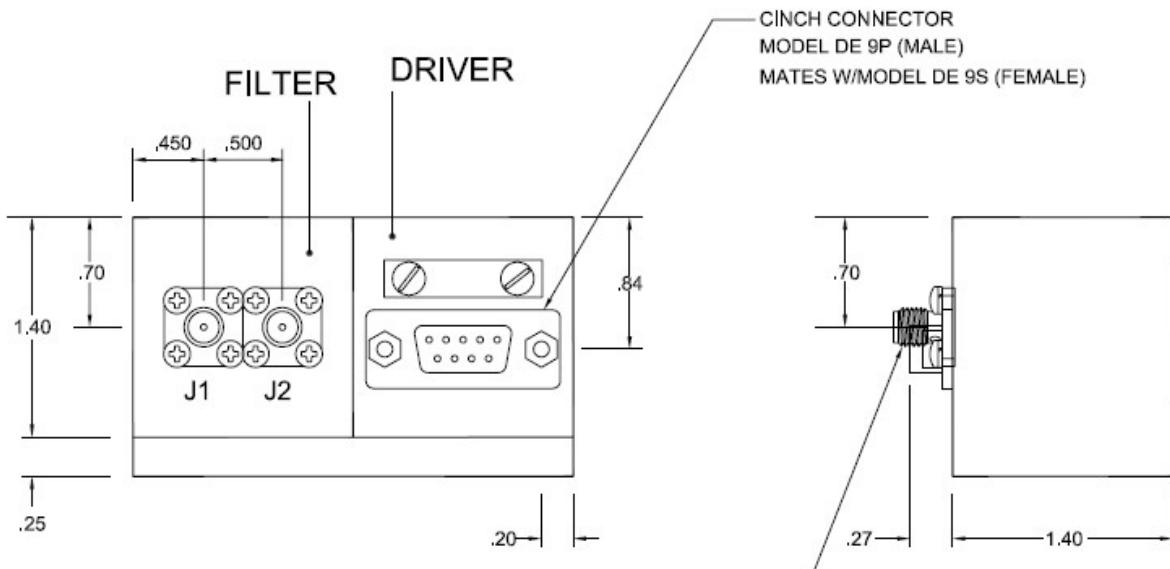

CONN	FUNCTIONS
1	0-10V DRV CONT.
2	CONT. RETURN
3	GND
4	- SUPPLIES VOLTAGE
5	+ SUPPLIES VOLTAGE
6	20-30 V HTR SUPPLY
7	HEATER RETURN
8	N/C
9	N/C
J1	FILTER RF INPUT
J2	FILTER RF OUTPUT

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
TOLERANCES ARE:

CONTRACT NO.

APPROVALS

DATE



MICRO LAMBDA WIRELESS, INC.

FRACTIONS DECIMALS ANGLES

CARPENTER 48

DRAWN N. NGUYEN

8/07/05

CHECKED

ISSUED



BRF WITH ANALOG DRIVER, 1.4" STANDARD

FINISH

ISSUED

SIZE

CAGE No.
0RN63


DWG. No.

21 - 021

REV.

A

DO NOT SCALE DRAWING

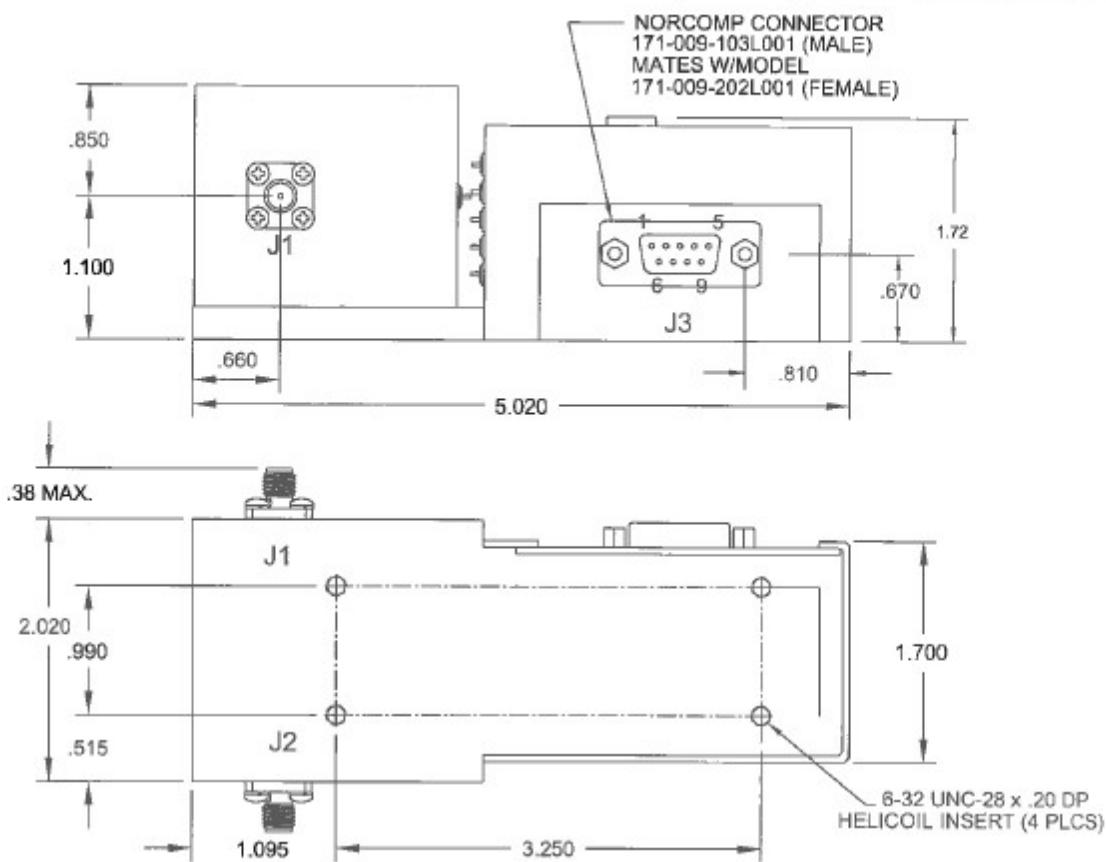

NOTES :

1. - DIMENSIONS ARE IN INCHES
2. - SUPPLY & GROUND WIRES = 20-22 GAUGE
ALL OTHER WIRES = 24-26 GAUGE
3. - THERMAL COMPOUND REQUIRED BETWEEN
BASE PLATE AND MOUNTING SURFACE


CONNECTIONS			
CONN.	TYPE	PIN #	FUNCTION
J1	V- FEMALE	THD	RF IN
J2	V- FEMALE	THD	RF OUT

J3 - CONNECTIONS	
CONN.	FUNCTION
1	DRIVER CONTROL V
2	CONTROL RETURN
3	GND
4	- SUPPLIES VOLTAGE
5	+ SUPPLIES VOLTAGE
6	20-30 V HTR SUPPLY
7	HEATER RETURN
8	N/C
9	N/C

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOURNEAU DE AVE.		CONTRACT NO.:	
FRACTIONAL	DECIMALS	ANGLES	
+	mm ± 0.2	deg. ± 0.10	
WEIGHT		APPROVALS	
20 OZ.		DRAWN: N.L.NGUYEN	DATE: 10/5/15
FINISH		ENGR: DS	10/5/15
MANUFACTURER:			
DO NOT SCALE DRAWINGS			
		SIZE:	CASE NO.:
		G.A.	SWL NO.:
		99 - 0021 - 138	
		REV:	

MICRO LAMBDA WIRELESS, INC.

BPF (2.0"X1.7") WITH ANALOG DRIVER & V CONN.

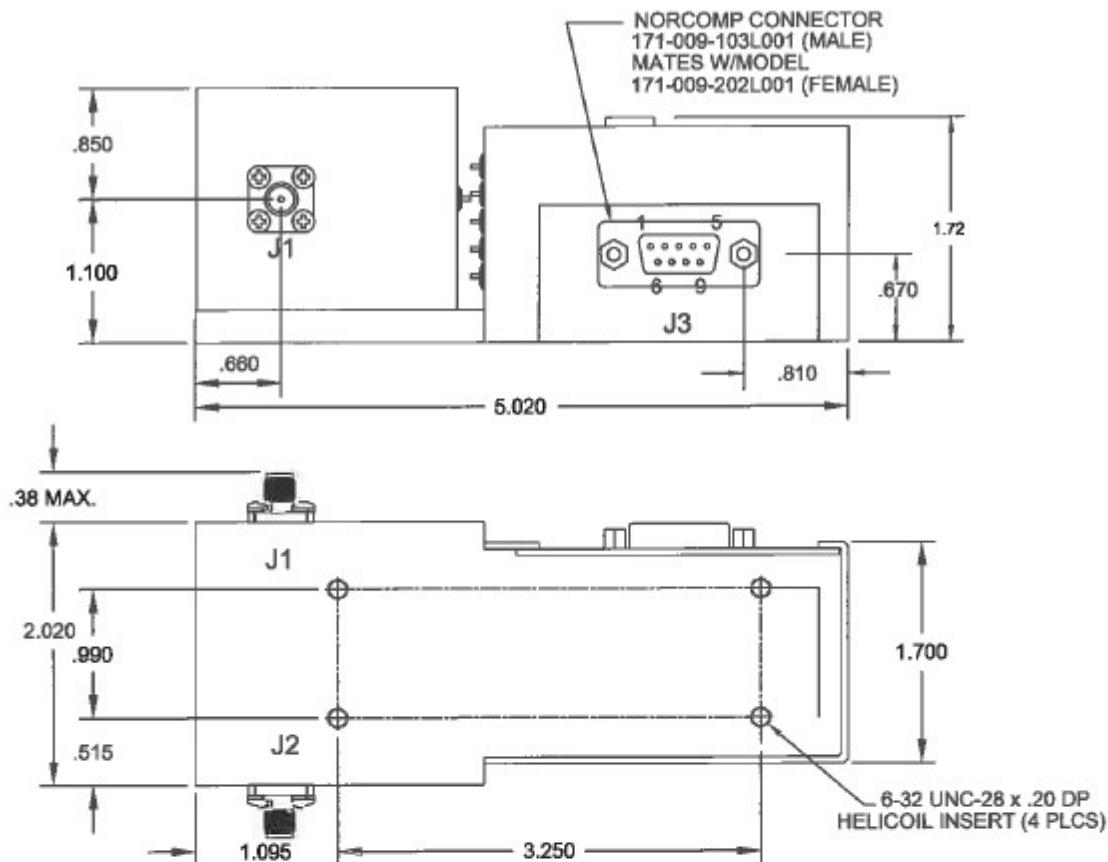


NOTES :

1. - DIMENSIONS ARE IN INCHES
2. - SUPPLY & GROUND WIRES = 20-22 GAUGE
ALL OTHER WIRES = 24-26 GAUGE
3. - THERMAL COMPOUND REQUIRED BETWEEN
BASE PLATE AND MOUNTING SURFACE

CONNECTIONS			
CONN.	TYPE	PIN #	FUNCTION
J1	K- FEMALE	THD	RF IN
J2	K- FEMALE	THD	RF OUT

J3 - CONNECTIONS	
CONN.	FUNCTION
1	DRIVER CONTROL V
2	CONTROL RETURN
3	GND
4	- SUPPLIES VOLTAGE
5	+ SUPPLIES VOLTAGE
6	20-30 V HTR SUPPLY
7	HEATER RETURN
8	N/C
9	N/C

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS: $\frac{1}{16}$, $\frac{1}{32}$, $\frac{1}{64}$ ANGLES: $\pm 20^\circ$ DEGREES: ± 20 MM: ± 0.05		CONTRACT NO.	
		APPROVALS	DATE
WEIGHT	20 oz.	DRAWN: N. NGUYEN	4/12/17
FINISH	ENR: PS	4/12/17	
MICRO LAMBDA WIRELESS, INC.			
BPF (2.0" X 1.7") WITH ANALOG DRIVER & K CONN.			
SIZE	CODE NO.	DRAW. NO.	REV.
	0RN63	99 - 0021 - 148	A
DO NOT SCALE DRAWING			

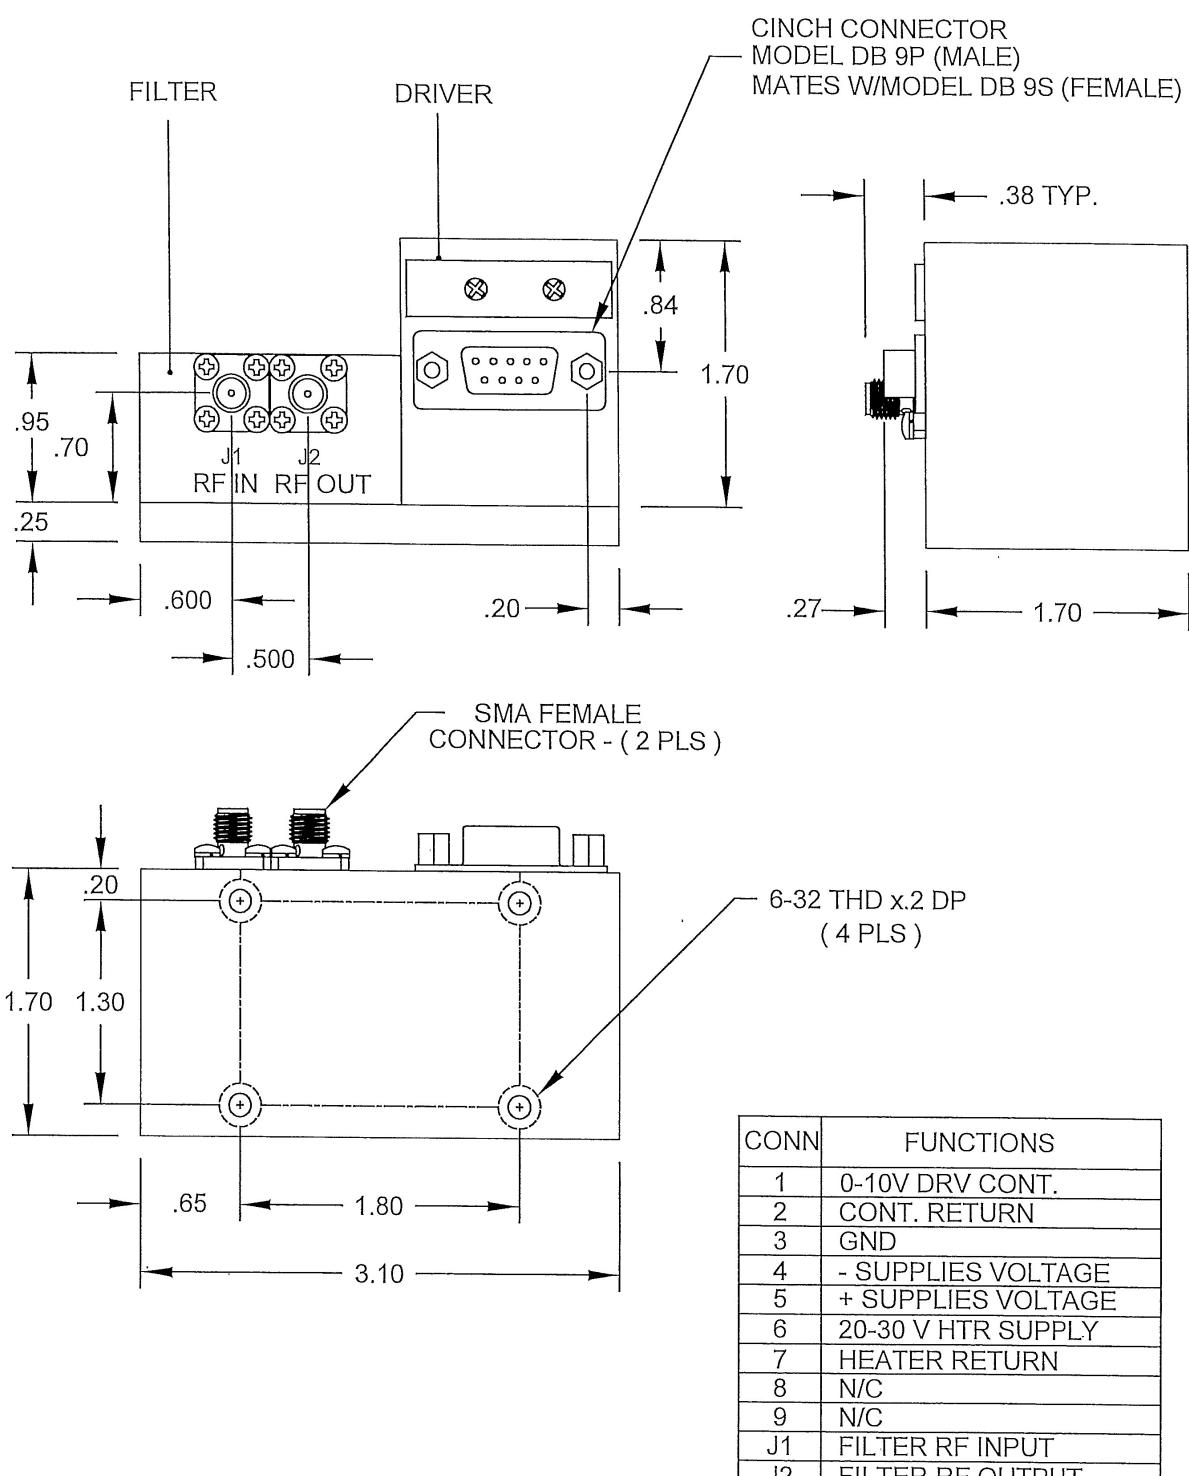

UNLESS OTHERWISE SPECIFIED DIMENSIONS
ARE IN INCHES
TOLERANCES ARE:

FRACTIONS DECIMALS ANGLES
▲ .xx *010
▲ .xxx *005

CONTRACT NO.



MICRO LAMBDA WIRELESS, INC.

MATERIAL

APPROVALS

DATE

DRAWN N.NGUYEN

01/05/2021

FINISH

CHECKED DS

1/5/21

ISSUED

ULTRA NOTCH LB BRF WITH ANALOG DRIVER, 1.7" STANDARD

DO NOT SCALE DRAWING

SIZE
0RN63



CAGE No.

0RN63

DWG. NO.

99 - 0021 - 165

REV. A

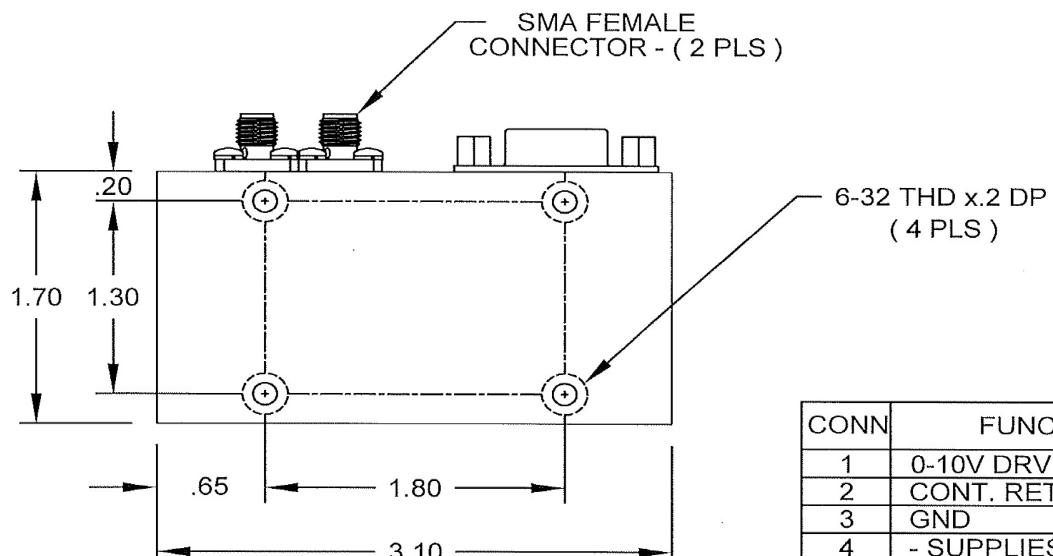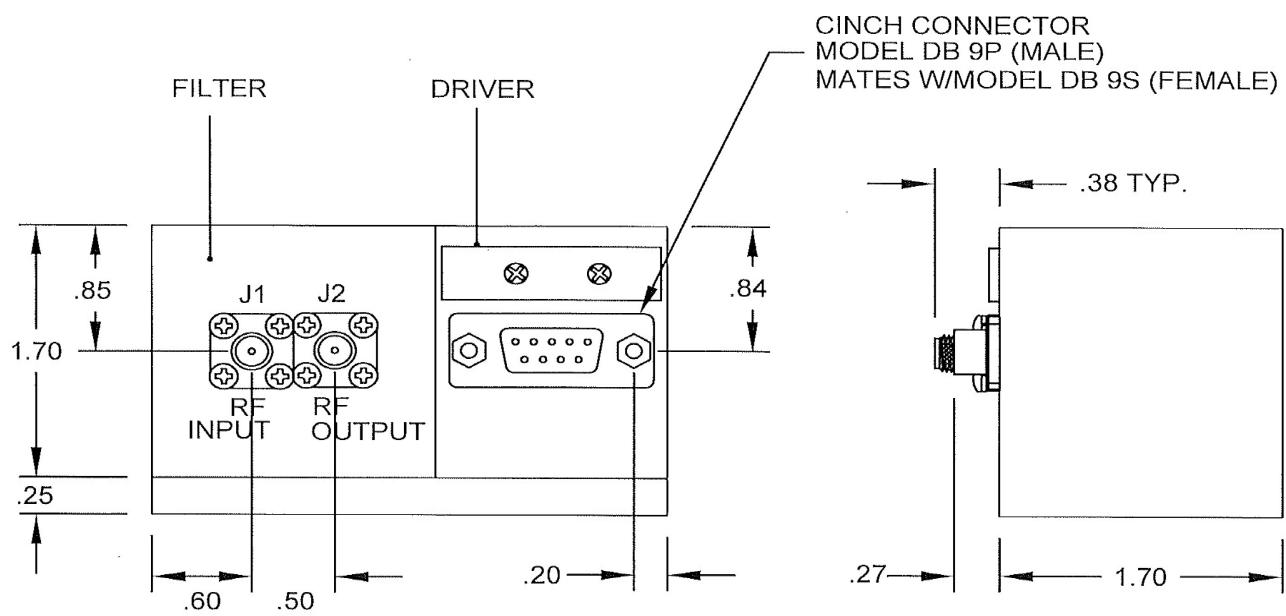

CONN	FUNCTIONS
1	0-10V DRV CONT.
2	CONT. RETURN
3	GND
4	- SUPPLIES VOLTAGE
5	+ SUPPLIES VOLTAGE
6	20-30 V HTR SUPPLY
7	HEATER RETURN
8	N/C
9	N/C
J1	FILTER RF INPUT
J2	FILTER RF OUTPUT

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCE ARE: FRACTIONS DECIMALS ANGLES ▲ xx ▲ 010 ▲ xxx ▲ 000		
CONTRACT NO.		
APPROVALS DATE		
MATERIAL	DRAWN N.NGUYEN	12/11/19
FINISH	CHECKED DS	12/11/19
ISSUED		
DO NOT SCALE DRAWING		



MICRO LAMBDA WIRELESS, INC.

BRF WITH ANALOG DRIVER, 1.7"

SIZE	CAGE No ORN63	DWG. NO. 99 - 0021 - 157	REV. A
------	------------------	-----------------------------	-----------