


FEATURES

- 1-12.4 GHz Frequency Coverage
- Excellent Power Flatness
- High Output Power
- Excellent Harmonic Rejection



DESCRIPTION

Micro Lambda **MLHG Series** Harmonic Generators/Multipliers cover multi-octave frequency bands from 1.0-12.4 GHz. They consist of a four stage YIG bandpass filter, a step recovery diode and matching networks at selected input frequency. Multi-Octave and Wideband Standard products provide output power levels of -30 dBm to -15 dBm and harmonic rejection from -50 dBc to -65 dBc minimum, depending on the input frequency selected.

Micro Lambda YIG tuned harmonic generators can be furnished stand alone, with integrated (or remote) analog or digital drivers, or with input 1 watt amplifiers.

SPECIFICATIONS




Guaranteed at 0 deg. To +65 deg. C. (Note 1)

Muti-Octave

Model No.	MLHG-1212	MLHG-2212	MLHG-5212	MLHG-1312
Input Frequency	100 MHz	200 MHz	500 MHz	1000 MHz
Output Frequency	1.0 - 12.4 GHz	1.0 - 12.4 GHz	1.0 - 12.4 GHz	1.0 - 12.4 GHz
Input Power (dBm)	+ 27 Min. + 30 Max.	+ 27 Min. + 30 Max.	+ 27 Min. + 30 Max.	+ 27 Min. + 30 Max.
Input VSWR, Max.	2.0:1	2.0:1	2.0:1	2.0:1
Output Power, Min.	-30 dBm	-25 dBm	-13 dBm	-15 dBm
Harmonic Rejection, Min.	-50 dBc	-65 dBc	-65 dBc	-65 dBc
Hysteresis, Max.	15 MHz	15 MHz	15 MHz	15 MHz
Tuning Sensitivity	20 MHz/mA	20 MHz/mA	20 MHz/mA	20 MHz/mA
Coil Resistance	6 Ohms	6 Ohms	6 Ohms	6 Ohms
Coil Inductance	80 mH	80 mH	80 mH	80 mH
YIG Heater Power				
Steady State 24 +/- 4V	100 mA	100 mA	100 mA	100 mA
Surge 24 +/- 4V	1000 mA	1000 mA	1000 mA	1000 mA
Case Style (Note 2)	31-001-2	31-001-2	31-001-2	31-001-2

Notes: 1) -54 to +85 degree C is available.
2) 1.7" Case Style is available.

Typical Performance Graphs

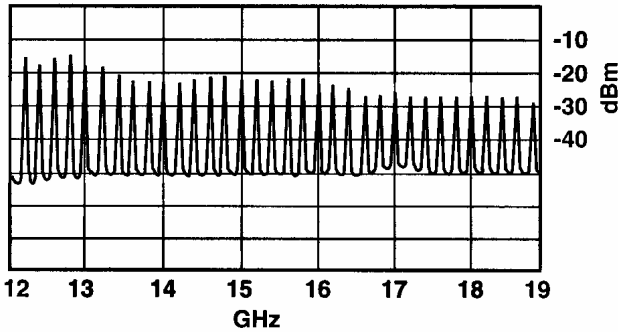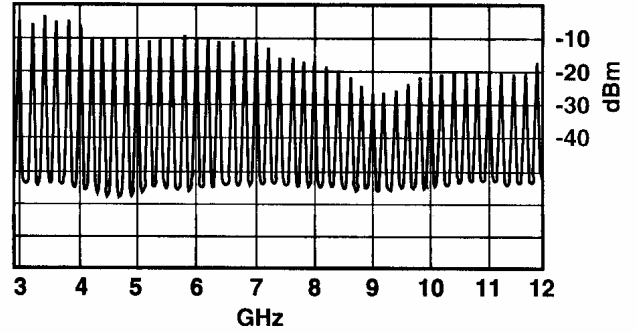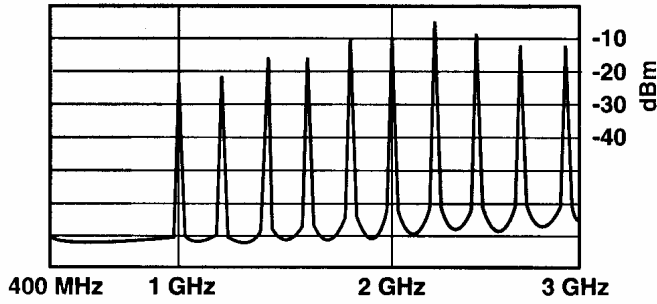

Input Frequency: 200 MHz
 Input Power: 1 Watt
 Output Frequency: 1-18 GHz
 Output Power: -30 dBm min.

Note:
 Undesired lower harmonics (400, 600 and 800 MHz) are suppressed with High Pass Filter.

CASE DRAWING – 31-001-2, 31-002-2

