







- 2-4 GHz Frequency Coverage
- FM/Phase-Lock Port
- TO-8 Package
- High Reliability

The MICRO LAMBDA **MLTM**-Series Miniature YIG-Tuned Oscillators cover the frequency range of 2-4 GHz. They are fitted with a low power main coil, and FM coil for phase locking. All units operate from a +8 Volt and -5 Volt supply and operate over the 0° to + 65°C temperature range. Units do not require a heater.

Guaranteed Specifications at 0° to +65° C Case Temperature

Micro Lambda Wireless, Inc. - 46515 Landing Parkway, Fremont California 94538 * Phone (510) 770-9221 * Fax (510) 770-9213

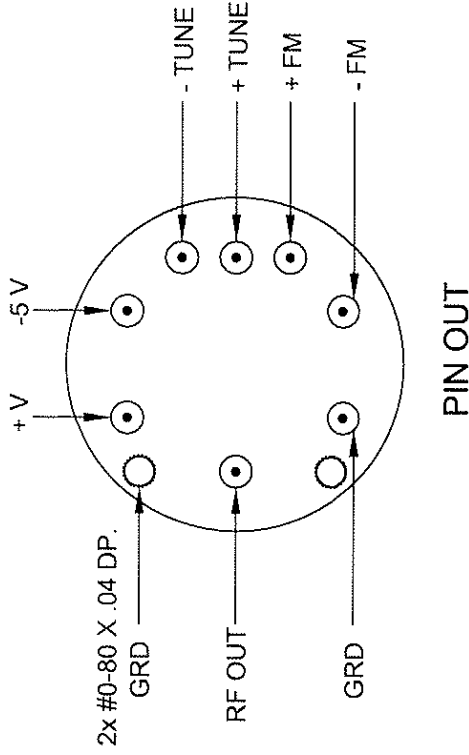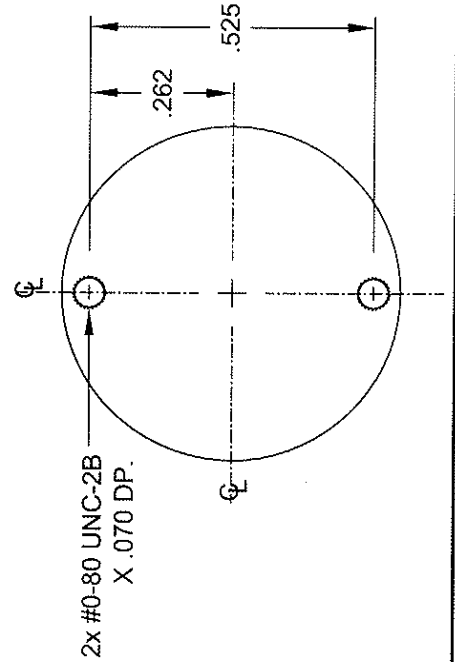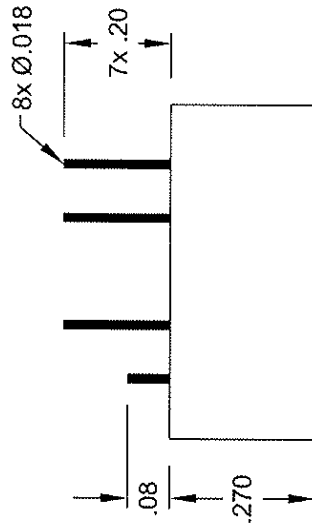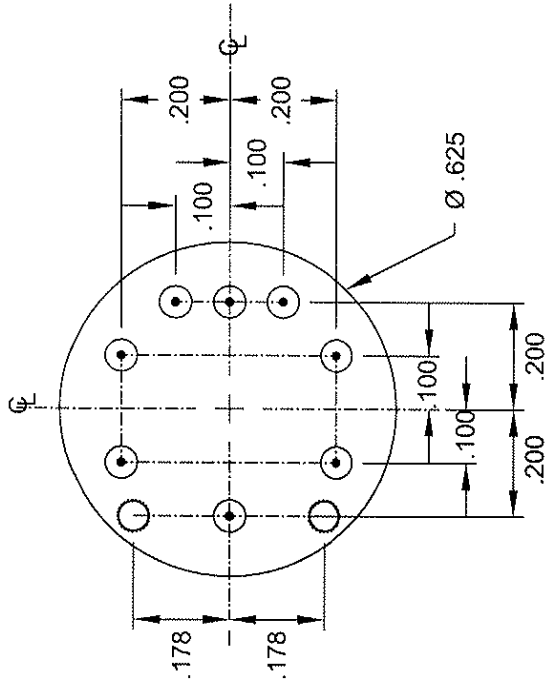

WEIGHT: .36 Oz (10g)

REV	DESCRIPTION	DATE	APPROVED

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES * .XX ±.010 * .XXX ±.005 MATERIAL		CONTRACT NO. APPROVALS DRAWN N NGUYEN 11/18/09 CHECKED <i>[Signature]</i> 11/18/09 ISSUED	
FINISH DO NOT SCALE DRAWING		SCALE SHEET	

MICRO LAMBDA WIRELESS, INC. PC MOUNT OSCILLATOR (Ø .625" X .270" HIGH)		CAGE NO. 0RN63	REV. 91 - 005
--	--	-------------------	------------------