





- 2-8 GHz Frequency Coverage
- FM/Phase-Lock Port
- TO-8 Package
- High Reliability


The MICRO LAMBDA **MLTM**-Series Miniature YIG-Tuned Oscillators cover the frequency range of 2-8 GHz. They are available in customer selected tuning ranges and are fitted with a low power main coil, and FM coil for phase locking. All units operate from a +8 Volt and -5 Volt supply and operate over the 0° to + 65°C temperature range. Units do not require a heater.

Guaranteed Specifications at 0° to +65° C Case Temperature

Micro Lambda Wireless, Inc. - 46515 Landing Parkway, Fremont California 94538 * Phone (510) 770-9221 * Fax (510) 770-9213

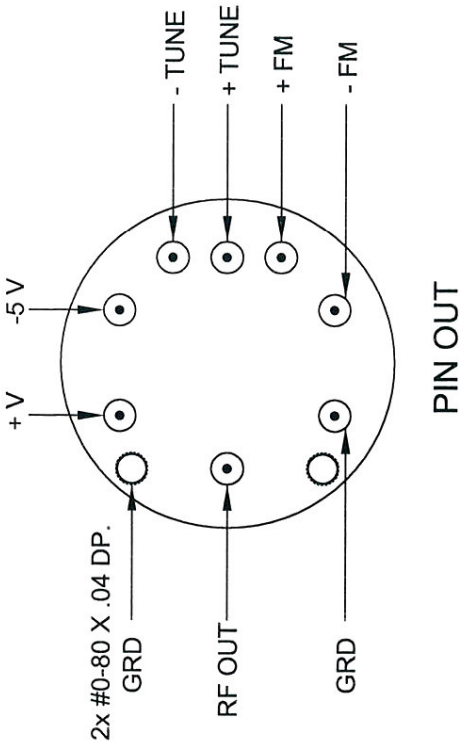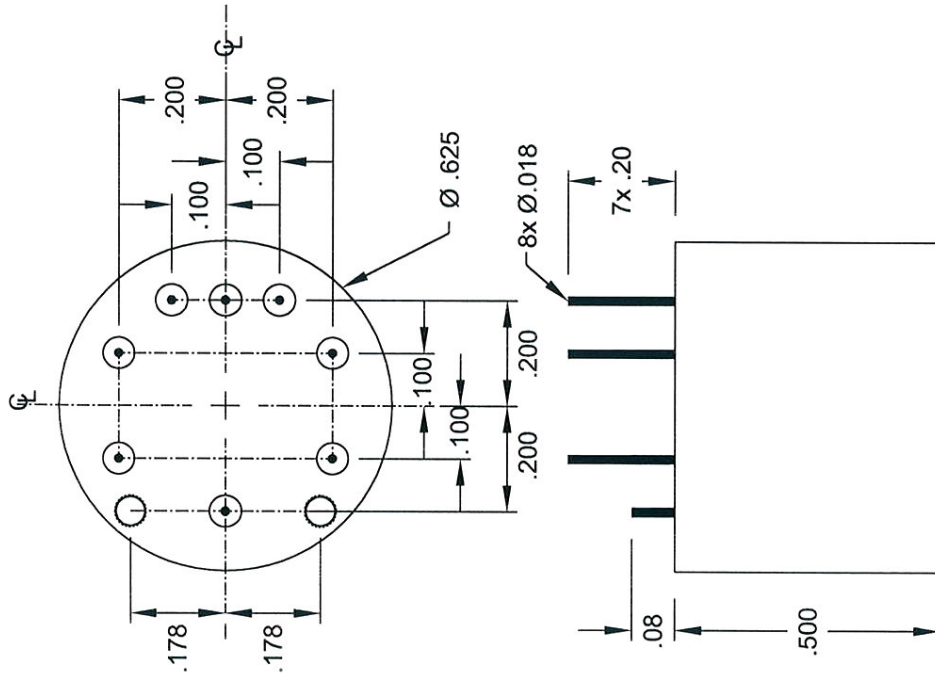

WEIGHT: .56 Oz (16g)

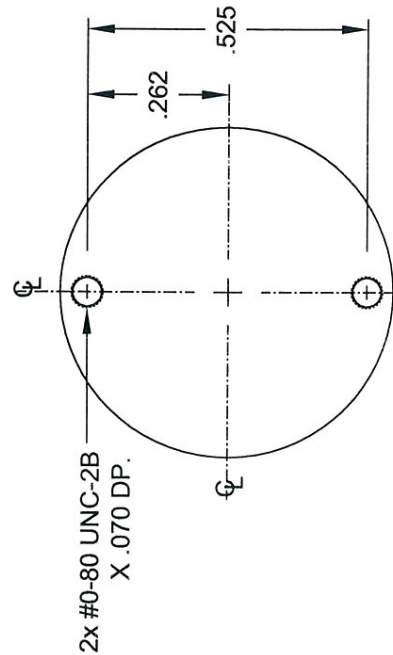

REV	DESCRIPTION	DATE	APPROVED

		MICRO LAMBDA WIRELESS, INC.	
PC MOUNT OSCILLATOR ($\varnothing .625$ " X .500" HIGH)		DWG. NO. 91 - 001	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCE ARE: FRACTIONS DECIMALS ANGLES * .xx ± .010 * .xxx ± .005	CONTRACT NO. APPROVALS DRAWN N. NGUYEN CHECKED ISSUED	DATE 11/18/09 11/18/09	REV. 91 - 001
DO NOT SCALE DRAWING		SCALE	SHEET