

FEATURES

- 2 - 20 GHz Frequency Coverage
- 10 Hz Step Size
- USB Interface
- Ethernet Interface

APPLICATIONS

Test Equipment
Test Sets
Production Test

DESCRIPTION

The **MLBS-Series** Bench test synthesizers are ideal for production test sets, laboratory tests and test equipment racks where generation of microwave signals is essential. Frequency coverage is 2 to 20 GHz. Each bench top synthesizer consists of a frequency synthesizer, Heat sink, power supply, cooling fans, keyboard, display, USB interface, Ethernet interface and a manual tuning knob. Components are housed in a 10" wide, 4" height, 13" deep enclosure with mounting feet and handle.



GENERAL SPECIFICATIONS

- Input Voltage:** 88 - 264 VAC @ 3 amps max, 47 to 63 Hz, Externally fused, Front panel push button on / off.
- Display:** The 2 line x 16 digit display of the bench test synthesizer shows the current center frequency setting on the top display line, the bottom display line is blank. A cursor is positioned under one of the digits on line 1. This cursor can be positioned using the < or > arrow keys. Entering a new frequency via the keypad will display numbers as they are entered on line 2. The new frequency is selected by pressing the MHz key on the keypad. If a resolution less than a MHz is to be set, the decimal point must be used.
- Keypad:** The bench test synthesizer provides a 16 key data entry keypad for simple operation. Pressing the > or < key will move the cursor to the right or left. Pressing the + key will increase the cursor position while the - key will decrease the cursor position. Frequency numbers and decimal point as needed are input via the keypad. The MHz key is also used as the enter data key.
- Rotary Knob:** The bench test synthesizer provides a tuning knob. Rotating the knob clockwise increases the frequency while rotating counter clockwise decreases the frequency. The knob is also used to enter and to exit the settings menu by simply pressing the knob.
- USB Interface:** USB 2.0 compliant, USB-Mini-B connector. Operating systems supported: Windows XP 32bit (All versions), Windows Vista; 32 and 64 bit (All versions), Windows 7; 32 and 64 bit (All versions). HID USB client mode interface, using Microsoft Windows Operating System native drivers. USB PC control interface software provided (Windows GUI).
- Ethernet Interface:** Ethernet interface: 10/100 Mbit, RJ45 connector. TCP/IP protocols supported: HTTP, UDP socket and Telnet. DHCP and Fixed IP modes. Web interface access using most standard internet browsers (IE, Firefox). UDP PC control interface software provided (Windows GUI)

MLBS GENERAL SPECIFICATIONS (Continued)

Environmental Specifications:

| | |
|---------------|--|
| Temperature - | Operating 0 °C to +60 °C Non-operating -40 °C to +71 °C |
| Shock - | Functional, 30 G per MIL-PRF-28800F table 2, class 3 Transit drop, per MIL-PRF-28800F table 13, class 3 Bench Handling, per MIL-PRF-28800F para 4.5.5.4.3, class 3 |
| Vibration - | Random 5-500 Hz per MIL-PRF-28800F table 2, class 3 |
| Humidity - | 5 to 95% per MIL-PRF-28800F table 2, class 3 |

Dimensions and Weight: Width - 10" Height - 4" Depth - 13"
Weight - 10 lbs.

RF Connectors: External Reference Input - SMA Female
RF Output - SMA Female

Included Accessories: Standard 120 VAC U.S. Power Cord, 6' CAT 5 Ethernet Cable, 6' USB-A to USB Mini-B Cable, User Manual, PC Control Software on CD-ROM and a Quick Start Guide.

PERFORMANCE SPECIFICATIONS

| Model No. | MLBS-2080 | MLBS-8020 | MLBS-2020 |
|---|-------------|-------------|-------------|
| RF Specifications | | | |
| Output Frequency (Note 1) | 2 - 8 GHz | 8 - 20 GHz | 2 - 20 GHz |
| Output Power Min. | +13 dBm | +10 dBm | +10 dBm |
| Po Variation over Freq/Temp | 4 dB | 6 dB | 6 dB |
| Step Size, Min. | 1 kHz | 1 kHz | 1 kHz |
| Switching Speed, 100 MHz Step, Typ. | 1 mS | 1 mS | 1 mS |
| 1000 MHz Step, Typ. | 3 mS | 3 mS | 3 mS |
| Full Band Step, Typ. | 5 mS | 6 mS | 7 mS |
| Warm-up Time ("Lock") @ 0C (Minutes) (with Internal Crystal Reference) | 3.0 | 3.0 | 3.0 |
| Output Impedance | 50 Ohms | 50 Ohms | 50 Ohms |
| Load VSWR | 2.0:1 | 2.0:1 | 2.0:1 |
| Harmonics | -12 dBc | -12 dBc | -12 dBc |
| Non-Harmonic Spurious | -60 dBc | -60 dBc | -60 dBc |
| Phase Noise Performance (with Internal Crystal Reference) | | | |
| @ 100 Hz Offset | -79 dBc/Hz | -70 dBc/Hz | -70 dBc/Hz |
| @ 1 kHz Offset | -95 dBc/Hz | -87 dBc/Hz | -86 dBc/Hz |
| @ 10 kHz Offset | -95 dBc/Hz | -88 dBc/Hz | -80 dBc/Hz |
| @ 100 kHz Offset | -117 dBc/Hz | -115 dBc/Hz | -104 dBc/Hz |
| @ 1 MHz Offset | -140 dBc/Hz | -138 dBc/Hz | -134 dBc/Hz |

MLBS PERFORMANCE SPECIFICATIONS (Continued)

Reference Oscillator Options

Option A

| | | | |
|-----------------------------|---------------|---------------|---------------|
| External Reference (Note 2) | 1 - 200 MHz | 1 - 200 MHz | 1 - 200 MHz |
| External Ref. Input Power | 0 +/- 3 dBm | 0 +/- 3 dBm | 0 +/- 3 dBm |
| Frequency Stability | Cust Supplied | Cust Supplied | Cust Supplied |

Option B

| | | | |
|---|---------------|---------------|---------------|
| External Reference with Internal Crystal (Note 3) | 1 - 100 MHz | 1 - 100 MHz | 1 - 100 MHz |
| External Ref. Input Power | 0 +/- 3 dBm | 0 +/- 3 dBm | 0 +/- 3 dBm |
| Frequency Stability | Cust Supplied | Cust Supplied | Cust Supplied |

Option C

| | | | |
|---------------------|-----------|-----------|-----------|
| Internal Reference | 100 MHz | 100 MHz | 100 MHz |
| Frequency Stability | +/- 1 PPM | +/- 1 PPM | +/- 1 PPM |

PLL Lock indicator on display and via software

MLBS Options:

Option A: External Reference / No Internal Reference

Option B: Internal Reference / External Reference



Option C: Internal Reference / No External Reference

Part Number Example: MLBS-2020B 2 GHz to 20 GHz with Internal and External Reference

Notes:

- 1) Special frequency ranges available.
 - 2) 50-100 MHz OCXO recommended for best phase noise performance. External reference directly effects phase noise performance.
 - 3) Output phase noise performance is not dependent on external reference phase noise.
-

REAR

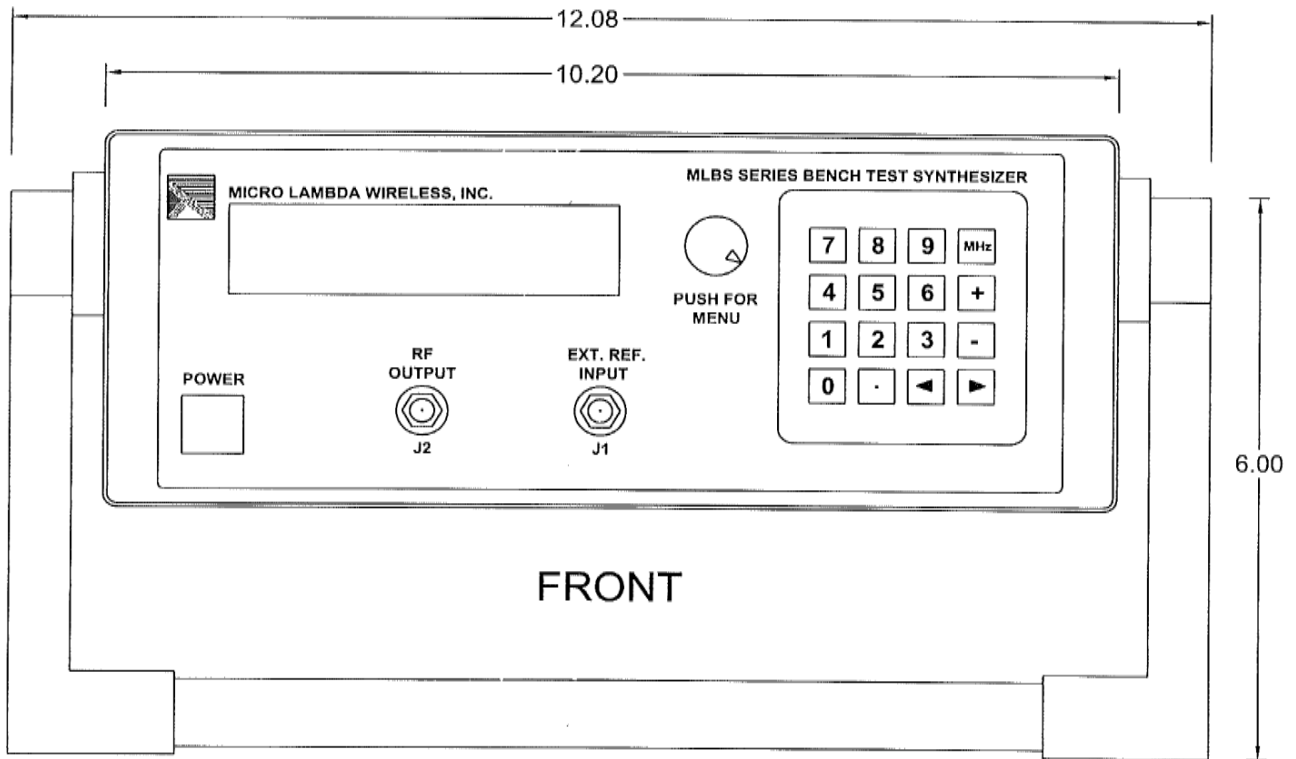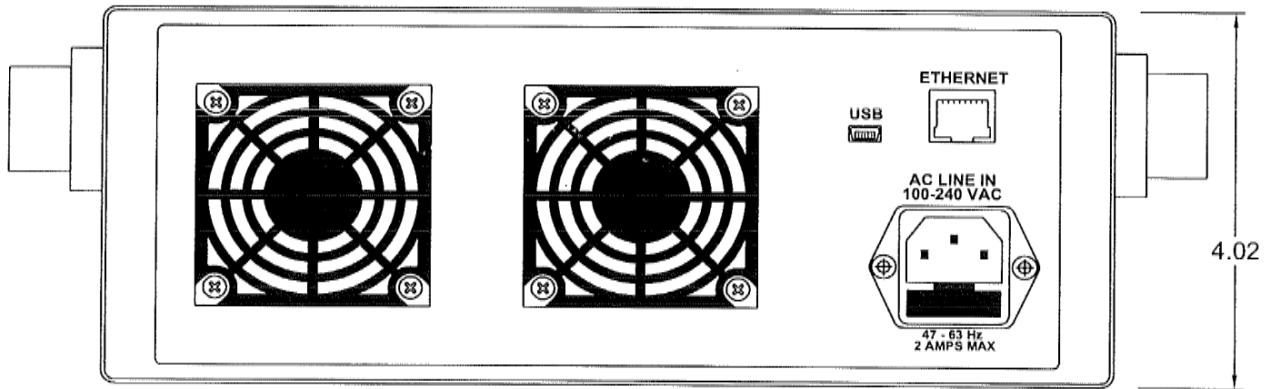

FRONT

NOTE:
- DEPTH WITHOUT HANDLE IS 13.00"

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
TOLERANCE ARE:
FRACTIONS DECIMALS ANGLES
+ .02
.xxx+.010

MATERIAL

FINISH

DO NOT SCALE DRAWING

| APPROVALS | | DATE |
|-----------|----------|--------|
| DRAWN | N.NGUYEN | 8/8/12 |
| ENGR. | DS | 8/8/12 |
| MANUF. | | |
| G.A. | | |



MICRO LAMBDA WIRELESS, INC.

MLBS SERIES BENCH TEST SYNTHESIZER

| SIZE | CAGE No | DWG. NO. | REV. |
|------|---------|-----------------|------|
| | 0RN63 | 99 - 0201 - 001 | |